



ELECTRICAL SPECIFICATIONS

Frequency Range: 2.4-2.485/5.15-5.85 GHz
 Gain: 7 dBi
 Polarization: 3 Vertical, 3 Horizontal
 Horizontal Beamwidth: 66°/65°
 Vertical Beamwidth: 66°/62°
 VSWR: ≤1.5:1, max 2.0
 Isolation: >30 dB
 Impedance: 50 Ω



MECHANICAL SPECIFICATIONS

Dimensions: 12.2" x 8.66" x 1.57" (310x220x40mm)
 Weight: 1.5 lb (0.68 kg)
 Installation: Flush Mount to Wall OR included Articulating Mount

Radome Material: ABS
 Connector: N-Style Plug
 Number of Leads: 6
 Cable Length: 36" (910mm)
 Cable Type: RG402 Plenum



ENVIRONMENTAL SPECIFICATIONS


Installation Environment: Indoor/Outdoor
 Operating Temperature: -40 to 158°F (-40 to 70°C)
 Wind Velocity: 134 mph (216 km/h)

WARRANTY

2 Year Limited Warranty



HORIZONTAL

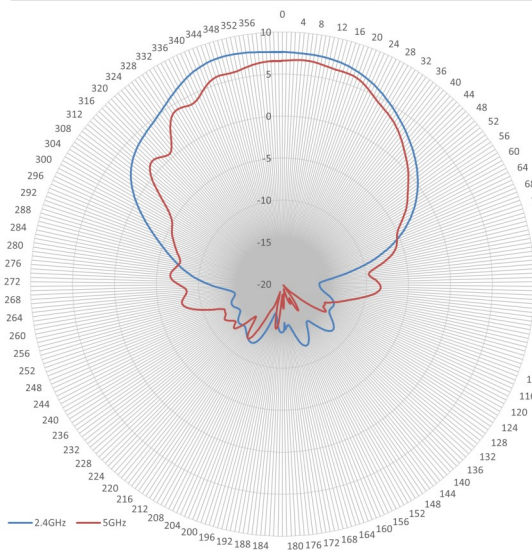

VERTICAL

