



ELECTRICAL SPECIFICATIONS

Frequency Range: 2.4-2.5 / 5.1-5.85 GHz
 Gain: 9.5 / 9.5 dBi
 Horizontal Beamwidth: 45° / 25°
 Vertical Beamwidth: 70° / 60°
 VSWR: <1.5:1 Max: 2.0
 Impedance: 50 Ω



MECHANICAL SPECIFICATIONS

Dimensions: 12.6" x 6.7" x 1.4" (320mm x 170mm x 35mm)
 Radome Material: ABS
 Connector: RPSMA Plug
 Number of Leads: 6

Cable Length: 36" (910mm)
 Cable Type: ATS-200
 Mounting: Flush Mount OR use included
 Articulating Mount



ENVIRONMENTAL SPECIFICATIONS


Installation Environment: Indoor/Outdoor

WARRANTY

2 Year Limited Warranty



HORIZONTAL

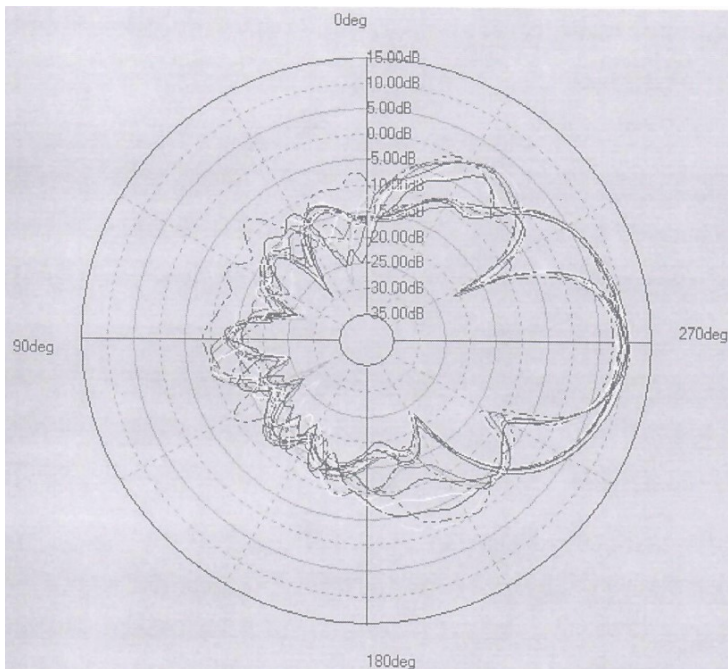

VERTICAL

