



ELECTRICAL SPECIFICATIONS

Frequency Range: 2.4-2.48/5.15-5.85/6-7.125 GHz
 Gain: 8/10/10 dBi
 Polarization: 4 Vertical / 4 Horizontal
 Horizontal Beamwidth: 65°/45°/40°
 Vertical Beamwidth: 65°/45°/40°

VSWR: $\leq 1.5:1$, max 2.0
 Isolation: >30 dB
 Impedance: 50 Ω
 Lightning Protection: None
 Max Input Power: 50 W per port



MECHANICAL SPECIFICATIONS

Dimensions: 15.4" x 15.4" x 1.57" (390x390x40mm)
 Weight: 1.5 lb (0.68 kg)
 Installation: Flush Mount to Wall or use
 Articulating mount (included)

Radome Material: ABS
 Connector: RPSMA
 Number of Leads: 8
 Cable Length: 36" (910mm)
 Cable Type: ATS-195



ENVIRONMENTAL SPECIFICATIONS


Installation Environment: Indoor/Outdoor
 Operating Temperature: -40 to 158°F (-40 to 70°C)
 Wind Velocity: 134 mph (216 km/h)
 IP Rating: IP66

WARRANTY

2 Year Limited Warranty



HORIZONTAL

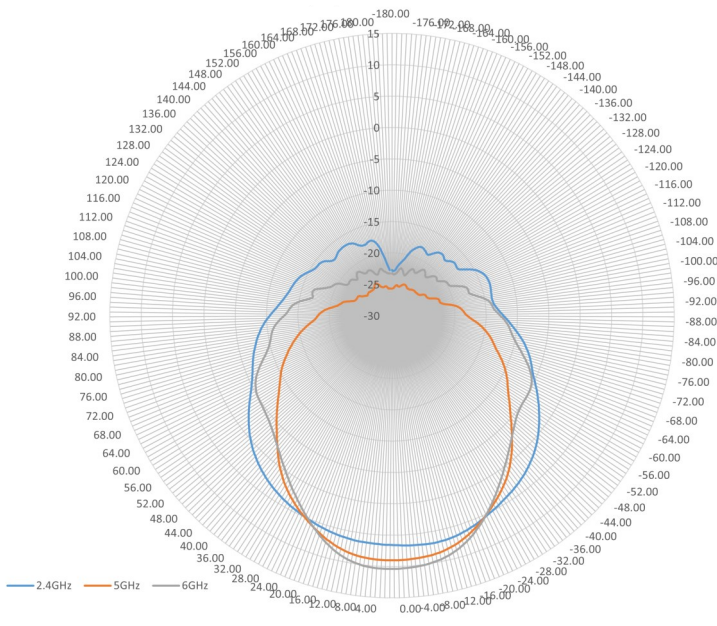

VERTICAL

