



ELECTRICAL SPECIFICATIONS

Frequency Range: 698-960/1710-2690/3300-4200MHz
Gain: 3/3/3 dBi
Polarization: Horizontal
Horizontal Beamwidth: 75°/70°/75°
Vertical Beamwidth: 75°/70°/75°
VSWR: <2.0



MECHANICAL SPECIFICATIONS

Dimensions: 10"x 9"x3.5" (254x228.6x88.9mm)
Weight: 2.2 lbs. (1 kg)
Installation: Flush Mount to Wall OR included Articulating Mount

Radome Material: ABS
Connector: SMA
Number of Leads: 2
Cable Length: 36" (910mm)
Cable Type: ATS-200



ENVIRONMENTAL SPECIFICATIONS


Installation Environment: Indoor/Outdoor
Operating Temperature: -40 to 158°F (-40 to 70°C)
Wind Velocity: 134 mph (216 km/h)

WARRANTY

2 Year Limited Warranty



HORIZONTAL

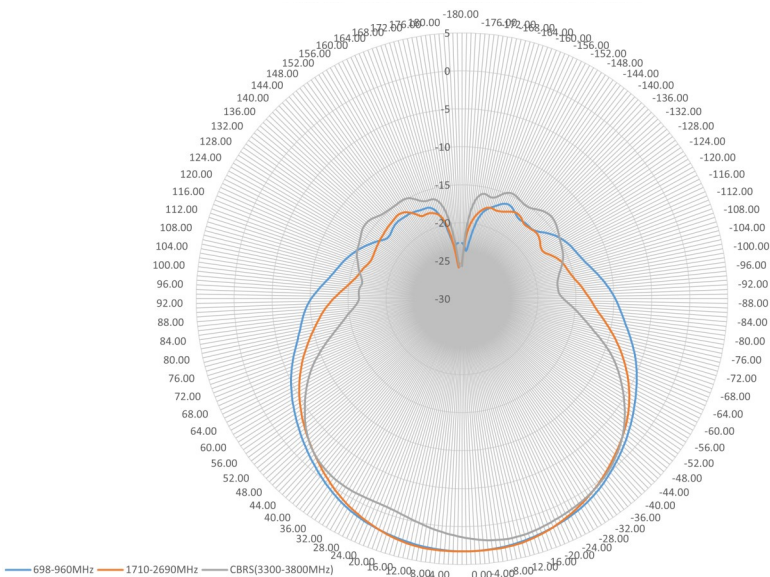

VERTICAL

